




# EcoCore EF Designer Series

Reflect Your Design Personality with a Real Style Statement

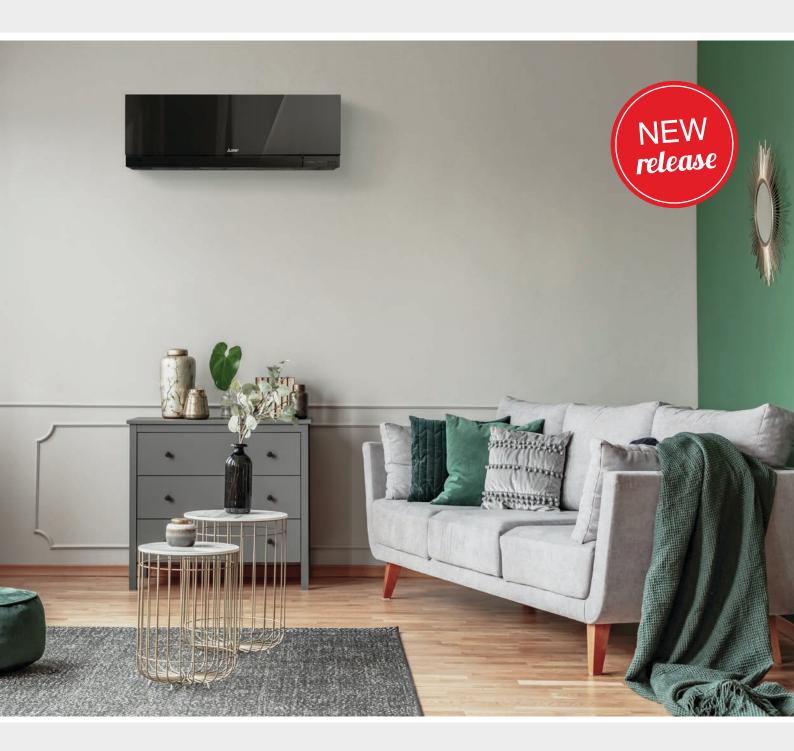

## EcoCore EF Designer Series

The new EcoCore Designer Series features exceptional energy efficiency and built-in Wi-Fi Control. Elegant and slimline in design, these heat pumps are available in a choice of colours including Rich Black Diamond, Matte Silver or new Pure White – so you can truly reflect your interior design style.



## Why Limit Yourself to One Colour When You Can Choose from Three?

Personalise your home interiors with the new EcoCore Designer Series High Wall Heat Pump. Available in a Rich Black Diamond, Matte Silver or new Pure White finish, now you can mix and match, blend in or stand out – it's up to you!









The Designer Series has been developed specifically with both good design and function in mind. The range features Advanced Filtration, whisper quiet operation and built-in Wi-Fi Control so you'll always come home to perfect comfort. In addition, more environmentally-friendly and energy efficient R32 refrigerant helps minimise the impact on the environment.

The slimline Designer Series is a true achievement in superior performance and looks. It's an investment in all round comfort that will never go out of style.



### **Energy Efficient EcoCore Inverter Technology**

Superior energy efficiency is achieved by incorporating a large, high density heat exchanger, an advanced high efficiency fan motor and a next generation inverter compressor that uses more efficient R32 refrigerant.



### More Environmentally-Friendly R32 Refrigerant

With a global warming potential that is 30% lower compared to older refrigerants such as R410A, next generation R32 refrigerant has a much lower environmental impact. Furthermore, zero ozone depleting R32 is easier to reuse and recycle.

## Designer Series


#### **Award-Winning Timeless Design**



The Designer Series features a distinctive contemporary, slimline profile and has been awarded the prestigious Red Dot Design Award in recognition for outstanding design quality.

The international jury only confers this sought-after seal of quality to products that set themselves apart significantly from comparable products thanks to their excellent design.

#### Dimensions (WxDxH): 885 x 195 x 299mm



Heating Capacity: 3.2 kW | Cooling Capacity: 2.5 kW

#### MSZ-EF35VGKW/B/S

Heating Capacity: 4.0 kW | Cooling Capacity: 3.5 kW

#### MSZ-EF42VGKW/B/S

Heating Capacity: 5.4 kW | Cooling Capacity: 4.2 kW

#### MSZ-EF50VGKW/B/S

Heating Capacity: 5.8 kW | Cooling Capacity: 5.0 kW

#### 7-Day Programmable Controller



All Designer Series Heat Pumps feature a built-in weekly timer, allowing you to program up to four time and temperature settings for each day of the week. You can now return to comfort without having to manually adjust the temperature. Perfect for anyone with a busy lifestyle, the 7-Day Controller is a great way to regulate your energy usage without compromising on comfort.

### Wi-Fi Control Built-in! Never Return to a Cold Home Again



With built-in Wi-Fi Control you can pre-heat or cool a room no matter where you are. On the way home, running late, coming home early, or even when you're in a different country, with Wi-Fi Control you'll always arrive home to total comfort.

Wi-Fi Control is Amazon Alexa and Google Home enabled so you can take your comfort to the next level and enjoy hands-free heat pump control.

## Wi-Fi CONTROL

#### **Quiet Operation**



The Designer Series indoor units feature Silent Mode. When selected, this fan speed setting provides very quiet operation from as low as 19dBA\* making the range ideal for bedrooms.

#### **Advanced Nano Platinum Filter**



The extra-large, washable 3D filter surface incorporates nanometre-sized platinum-ceramic particles designed to effectively collect fine dust particles, deodorise the air and eliminate bacteria at the same time. This level of advanced filtration is better at the collection of dust in comparison to conventional filters.

### Blue Fin Coating - Built to Withstand the Elements



The heat exchanger of the outdoor unit has been treated with Blue Fin Anti-Corrosion Treatment, slowing the corrosion process caused by salt and sulphur in the air especially in coastal and high sulphur areas.





<sup>\*</sup> EF25 indoor sound level on lowest fan setting in Cooling Mode

## EcoCore EF Designer Series Specifications



|                    | TYPE                                   |             |       | High Wall System                              |                              |                              |                              |
|--------------------|--|-------------|-------|---|------------------------------|------------------------------|------------------------------|
|                    | SERIES                                 |             |       |   | EcoCore EF I                 | Designer Series              |                              |
|                    | MODEL                                  |             |       | MSZ-EF25                                      | MSZ-EF35                     | MSZ-EF42                     | MSZ-EF50                     |
| QUICK<br>Glance    |  | REFRIGERANT |       | R32   |                              |                              |                              |
|                    | INDOOR UNIT                            |             |       | MSZ-EF25VGKW/B/S                              | MSZ-EF35VGKW/B/S             | MSZ-EF42VGKW/B/S             | MSZ-EF50VGKW/B/S             |
|                    | OUTDOOR UNIT                           |             |       | MUZ-EF25VG                                    | MUZ-EF35VG                   | MUZ-EF42VG                   | MUZ-EF50VG                   |
|                    | COOL                                   |             |       | 2.5kW<br>4.63 EER<br>19 dBA*                  | 3.5kW<br>3.85 EER<br>21 dBA* | 4.2kW<br>3.50 EER<br>28 dBA* | 5.0kW<br>3.23 EER<br>30 dBA* |
|                    | HEAT                                   |             |       | 3.2kW<br>4.57 COP<br>21 dBA*                  | 4.0kW<br>4.21 COP<br>21 dBA* | 5.4kW<br>3.71 COP<br>28 dBA* | 5.8kW<br>3.72 COP<br>30 dBA* |
|                    | ENERGY RATING                          |             |       | 4.0 2.5                                       | 3.5 2.0                      | 3.0 2.0                      | 3.0 2.0                      |
| COOL               | Capacity                               | Rated       | [kW]  | 2.5   | 3.5                          | 4.2                          | 5.0                          |
|                    |  | Min-Max     | [kW]  | 0.9 - 3.4                                     | 1.1 - 4.0                    | 0.9 - 4.6                    | 1.4 - 5.4                    |
|                    | Input                                  | Rated       | [kW]  | 0.54  | 0.91                         | 1.20                         | 1.55                         |
|                    | EER                                    |             |       | 4.63  | 3.85                         | 3.50                         | 3.23                         |
|                    | AEER                                   |             |       | 4.60  | 3.83                         | 3.49                         | 3.22                         |
|                    | Star Rating                            |             |       | 4.0   | 3.5                          | 3.0                          | 3.0                          |
|                    | Indoor                                 | (Quiet)     | [dBA] | 19  | 21                           | 28                           | 30                           |
|                    | Sound<br>Level                         | (Low-SHi*)  | [dBA] | 23-29-36-42                                   | 24-30-36-42                  | 31–35–39–43                  | 33-36-40-43                  |
|                    | Running Current (In+Out)               |             | [A]   | 3.0   | 4.2                          | 5.4                          | 6.9                          |
|                    | Air Volume In (SHi*)                   |             | [L/s] | 175   | 175                          | 187                          | 188                          |
| HEAT               | Capacity                               | Rated       | [kW]  | 3.2   | 4.0                          | 5.4                          | 5.8                          |
|                    |  | Min-Max     | [kW]  | 1.0-4.2                                       | 1.3–5.1                      | 1.3–6.3                      | 1.4 - 7.5                    |
|                    | Input                                  | Rated       | [kW]  | 0.70  | 0.95                         | 1.46                         | 1.56                         |
|                    | COP                                    |             |       | 4.57  | 4.21                         | 3.71                         | 3.72                         |
|                    | ACOP                                   |             |       | 4.55  | 4.20                         | 3.70                         | 3.71                         |
|                    | Star Rating                            |             |       | 2.5   | 2.0                          | 2.0                          | 2.0                          |
|                    | Indoor<br>Sound<br>Level               | (Quiet)     | [dBA] | 21  | 21                           | 28                           | 30                           |
|                    |  | (Low-SHi*)  | [dBA] | 24-29-37-45                                   | 24-30-38-46                  | 30-35-41-48                  | 33-37-43-49                  |
|                    | Running Current (In+Out)               |             | [A]   | 3.5   | 4.4                          | 6.5                          | 7.1                          |
|                    | Air Volume In (SHi*)                   |             | [L/s] | 198   | 212                          | 220                          | 243                          |
|                    | Standard                               |             |       | 7-Day Programmable Controller                 |                              |                              |                              |
| Controller         | Optional Wired 7-Day Timer             |             |       | Optional: PAR Controller (Interface Required) |                              |                              |                              |
| Wi-Fi              |  |             |       | Built-in                                      |                              |                              |                              |
|                    | (Powered From Outdoor Unit)            |             |       | 230 V / Single Phase / 50 Hz                  |                              |                              |                              |
| Power Supply       | Maximum Current                        |             | [A]   | 7.1   | 7.1                          | 10.0                         | 14.0                         |
| Indoor             | Dimensions (WxDxH)                     |             | [mm]  | 885 x 195 x 299                               |                              |                              |                              |
|                    | Weight                                 |             | [kg]  | 11.5  |                              |                              |                              |
| Outdoor            | Dimensions (WxDxH)                     |             | [mm]  | 800 x 285 x 550 800 x 285 x 714               |                              |                              |                              |
|                    | Weight                                 |             | [kg]  | 31  | 34                           | 35                           | 40                           |
|                    | Sound Level - SPL<br>(Cooling-Heating) |             | [dBA] | 47-48   | 49-50                        | 50-51                        | 52-52                        |
| Piping             | Diameter (Liquid/Gas)                  |             | [mm]  | 6.35 / 9.52                                   | 6.35 / 9.52                  | 6.35 / 9.52                  | 6.35 / 9.52                  |
|                    | Max. Length/Height <sup>†</sup>        |             | [m]   | 20 / 12                                       | 20 / 12                      | 20 / 12                      | 30 / 15                      |
|                    | Chargeless Piping Length               |             | [m]   | 7   | 7                            | 7                            | 7                            |
| Operation Range    | Cooling                                |             | [°C]  | -10 / 46                                      | -10 / 46                     | -10 / 46                     | -10 / 46                     |
| Outdoor            | Heating                                |             | [°C]  | -15 / 24                                      | -15 / 24                     | -15 / 24                     | -15 / 24                     |
| Indoor Unit Colour |  |             |       |   | Black Diamond / Ma           | atte Silver / Pure White     |                              |

EER = Energy Efficiency Ratio COP = Coefficient of Performance  ${\sf AEER} = {\sf Annual\ Energy\ Efficiency\ Ratio}$  $\mbox{ACOP} = \mbox{Annual Coefficient of Performance}$  SPL = Sound Pressure Level

<sup>1</sup> SHi = Super High

Rating Conditions (AS / NZS 3823). † Maximum length is inclusive of height differential i.e. Cooling: Indoor: 27°C DB, 19°C WB. Outdoor: 35°C DB



Black Diamond Technologies Limited



**Exclusive New Zealand** Partner Since 1981



 $<sup>^2</sup>$  Low-SHi = Low-Medium-High-Super High

<sup>&</sup>lt;sup>3</sup> SPL measured under rated operating frequency

<sup>\*</sup> Indoor Sound Levels rated at lowest fan speed.

<sup>(20/12)</sup> means the pipe can be 12m high and 8m  $\,$  Heating: Indoor: 20°C DB Outdoor: 7°C DB, 6°C WB. across for a total length of 20m.